

**STANDARD**

# CORRUGATED

- Manufactured from flexible HDPE
- Rugged corrugated design is flexible and light weight, yet provides excellent crush resistance
- Outstanding long term cable protection from shifting ground, rock and root impingement
- Provides a permanent pathway, simplifies future cable repairs or replacement
- Factory pre-installed Bull-Line™ Pull Tape with EVEN-LOAD™, ensures extra slack at any access point throughout the reel. Available 500 lb–6,000 lb tensile strength or locatable. Comes standard on 2"; is available for 1"-1.5"



**installation types**

Existing Conduit  
Indoor  
Short Runs

**sizes range**

1.0" 1.5"  
1.25" 2.0"

**standard colors 1", 1¼", 1½"**



custom colors available

**standard colors 2"**




**FEATURES**

STANDARDS FOR 1", 1¼", 1½"	STANDARDS FOR 2"
<b>PUT-UPS</b> Continuous lengths on reels or in coils	<b>PUT-UPS</b> Available in 250' coils only
<b>FOOTAGE MARKINGS</b> Sequential foot or meter markings; custom print streams available	<b>SHIPS</b> 3 coils per pallet
<b>OPTIONS FOR 1", 1¼", 1½"</b>	<b>SINGLE WALL</b> standard conduit
<b>UV PROTECTANT</b> for above ground applications	<b>1250 LB PULL TAPE</b> comes standard
<b>PLENUM &amp; RISER</b> for behind the wall applications	



+1 800 847 7661  
WWW.DURALINE.COM



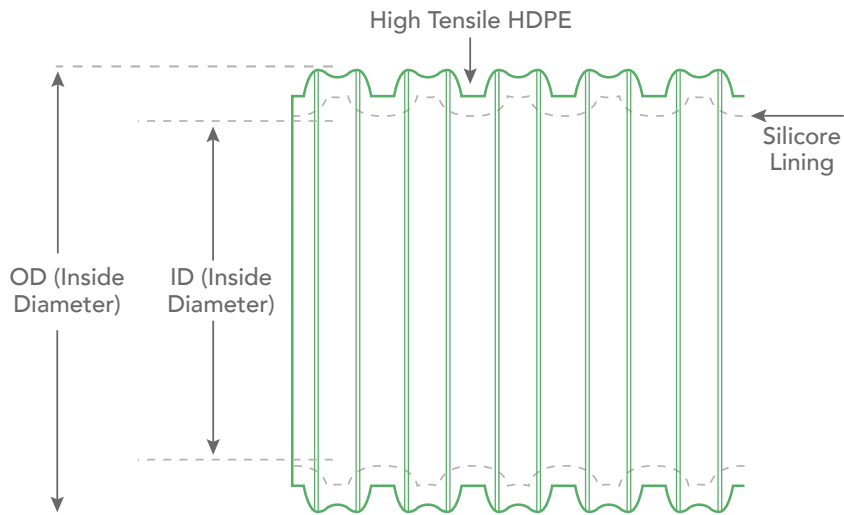

### CORRUGATED TECHNICAL SPECIFICATIONS

NOMINAL SIZE	NOMINAL OD (IN)	ID REF (IN)	MIN WALL THICK (IN)	BRITTLENESS TEMP	BEND RADIUS* (IN)	WEIGHT (LB/FT)	SWPS† (LBS)
1"	1.385	1.220	0.045	-75°C	14	0.113	500
1.25"	1.570	1.440	0.045	-75°C	16	0.125	500
1.5"	1.824	1.670	0.055	-75°C	19	0.165	500
2"	2.490	2.045	0.020	-75°C	22	0.196	500

\*Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.  
 †Safe working pull strength is calculated at 80% of tensile or breaking strength

### 2" CORRUGATED ORDERING INFO

NOMINAL SIZE	COLOR	PART NUMBER
2"	Black	20003440
2"	Dark Grey	20004740
2"	Orange	20004739
2"	Red	20003441
2"	Yellow	20004741